



Sewing Machine Cover

Read all instructions carefully. 1/2" seam allowance included in all measurements.

Finished size: 17 1/2" W X 15 3/4" H X 9" D

Materials Needed:

Mary's Mottos Fabric	VIP #61114-J	1Yd
Mary's Mottos Allover		
Yellow Fabric	VIP # 61118-S	1 1/2 Yds
Polyester Fleece	1 1/2Yds.	
Wide Double Fold Binding	2 Pkgs	

1. From the motto fabric cut 2-13 1/2" X 18" pieces for the outside front and back and 1-9 1/2" X 41 1/2" piece for outside gusset.
2. From the allover yellow fabric and the fleece cut the following:
 - 1-47 1/2" X 9 1/2" piece for gusset lining
 - 2-16" X 18" pieces for the front and back lining
 - From the allover yellow fabric cut:
 - 2-3 1/2" X 18" strips for the front and back bands
 - 2-3 1/2" X 9 1/2" strips for the side bands
 - 2-9 1/2" X 12" pieces for the pockets
 - (These pieces do not need fleece) **Illustration 1**
3. With right sides together stitch the 18" bands to the bottom of the front and back pieces of the cover of mottos fabric. Stitch the 9 1/2" bands to each end of the outside gusset.
4. Baste the lining to the front and back pieces with the right side of the fabrics facing out and the fleece sandwiched in between. Baste the gusset to the lining in the same manner. Using a cup, round off the top pointed corners on the front and back pieces. **Illustration 2**
5. Fold the 9 1/2" X 12" pocket pieces in half with the wrong sides together and press. Baste one to the bottom of each gusset end to form pockets. On one side stitch one pocket down the middle to form two smaller pockets. **Illustration 3**
6. Open bias tape as in illustration. With right sides together stitch to the lower edge of the front and back cover and both ends of the gusset. The raw edges should be even and you should stitch in the crease. Turn the tape over the seam allowance and hand stitch. **Illustration 4**
7. To assemble the cover, baste the front piece to one long edge of the gusset. You should have linings together and seams facing out. Baste the second piece to the other long edge.
8. Stitch the bias tape along the seam lines as in step 6, leaving about 1" longer at bottom ends. **Illustration 5**
9. Turn raw ends to inside cover and stitch in place.

See next page for Illustrations.

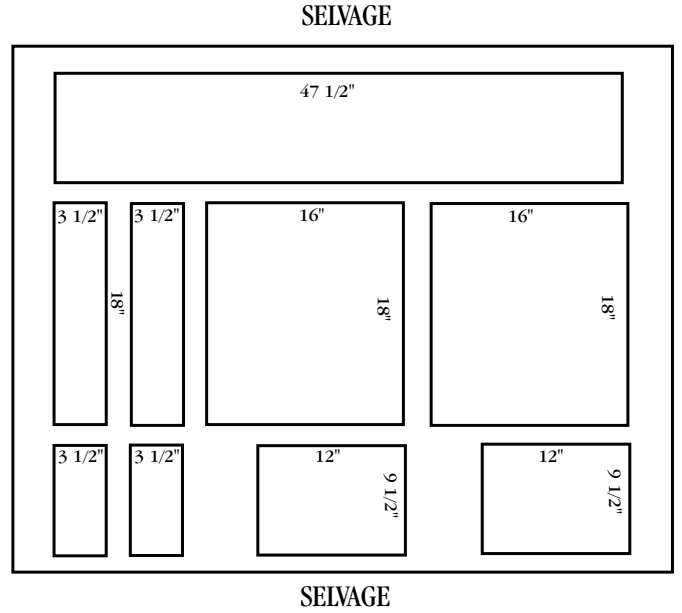
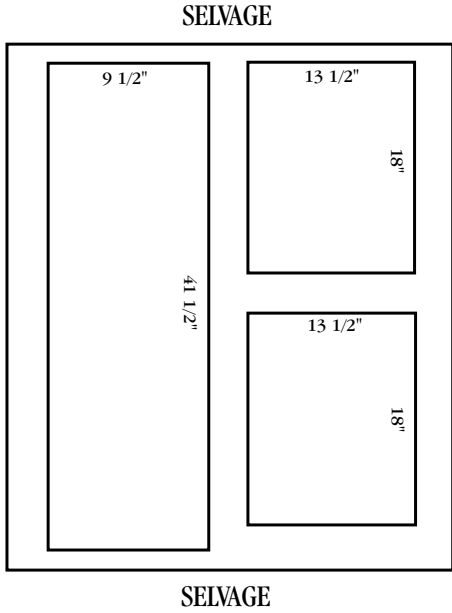


ILLUSTRATION 1

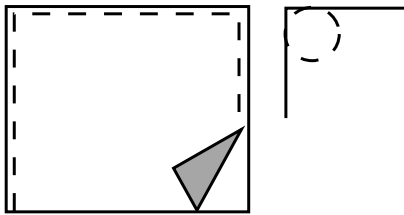


ILLUSTRATION 2



ILLUSTRATION 3

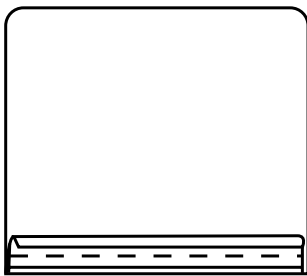


ILLUSTRATION 4

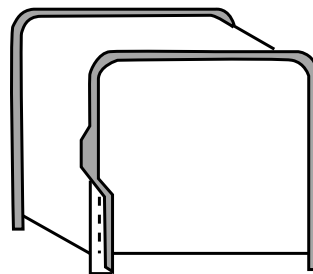


ILLUSTRATION 5